




# NCR SelfServ™ 27 ATM Site Preparation



## PRODUCT IDENTIFICATION

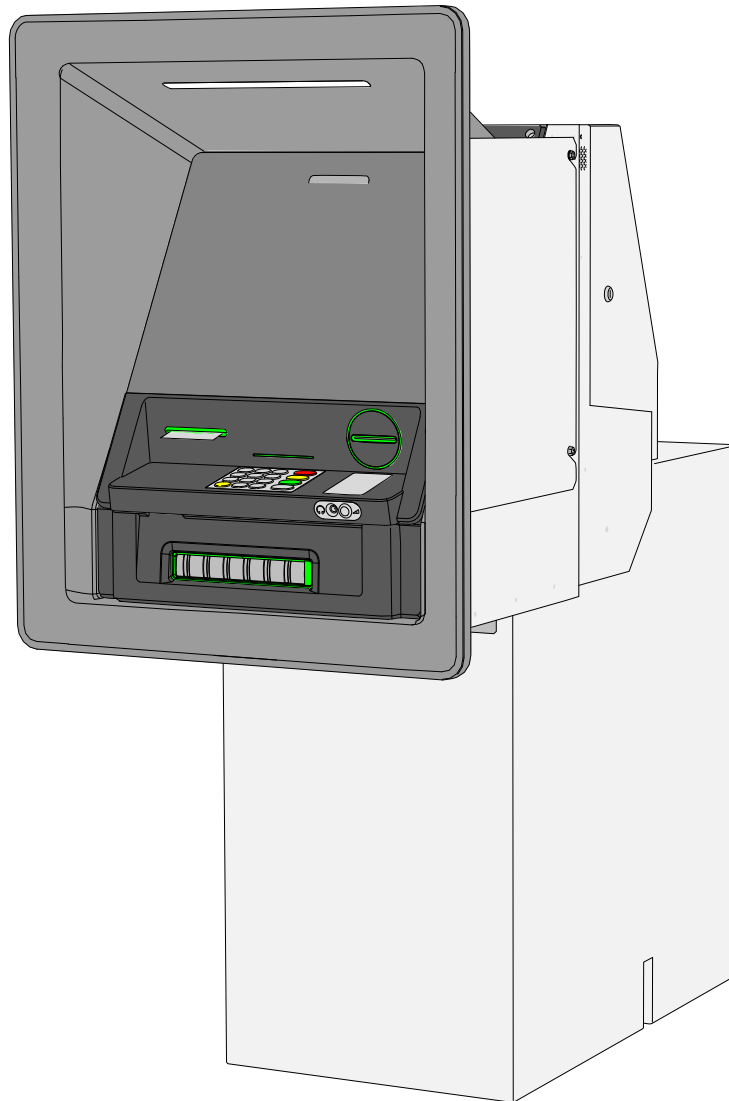

NCR Global Solutions Ltd.

Made in UK

Manufactured: Xxxxxx XXXX

NCR SelfServ™ 27

Class: 6627

Tracer: XX - XX


Văc: XXX - XXXv

Hz: 50/60

Model: XXXX

Serial: XX - XXXXXXXX

A: X.X



ACN 000 003 592

### Electromagnetic Compatibility


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This apparatus does not exceed Class A limits for radio noise emissions set out in the Radio Interference Regulations of Canada.


Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada

Complies with FDA Radiation Performance Standards, 21 CFR Subchapter J

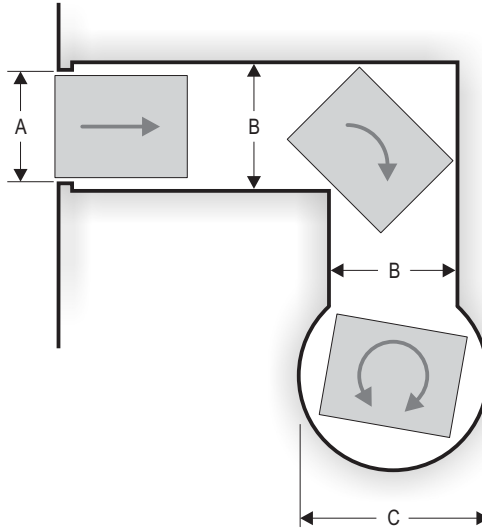


|          |                              | Packaged ATM<br>(pallet, carton<br>and lid) | Packaged ATM<br>(pallet and<br>carton) | Unpackaged ATM                |                              |
|----------|------------------------------|---------------------------------------------|----------------------------------------|-------------------------------|------------------------------|
|          |                              |                                             |                                        | CEN 1                         | CEN IV                       |
| <b>A</b> | Doorway or straight corridor | <b>818 mm</b><br>(32.20in.)                 | <b>813 mm</b><br>(32.01 in.)           | <b>562 mm</b><br>(22.13 in.)  | <b>562 mm</b><br>(22.13 in.) |
| <b>B</b> | Corridor with corner         | <b>1091 mm</b><br>(42.95 in.)               | <b>1075 mm</b><br>(42.32in.)           | <b>786 mm</b><br>(30.94 in.)  | <b>795 mm</b><br>(31.30in.)  |
| <b>C</b> | Rotation about centre        | <b>1662 mm</b><br>(65.43 in.)               | <b>1629 mm</b><br>(64.13in.)           | <b>1232 mm</b><br>(48.50 in.) | <b>1254mm</b><br>(49.37 in.) |

## Heights and Depths

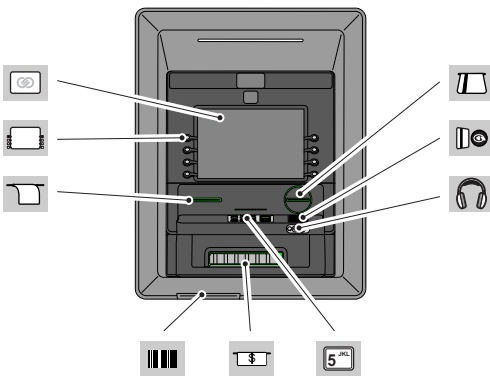


| Facia Item |                                                       |                     | Height<br>from base<br>of ATM | Depth<br>from front<br>of barcode<br>shelf | Depth from<br>front of collar |
|------------|-------------------------------------------------------|---------------------|-------------------------------|--------------------------------------------|-------------------------------|
|            | Touchscreen<br><b>381 mm</b> (15.0 in.)               | Top                 | <b>1175 mm</b><br>(46.26 in.) | <b>285 mm</b><br>(11.22 in.)               | <b>275 mm</b><br>(10.83 in.)  |
|            | Display with FDKs<br><b>381 mm</b> (15.0 in.) Display | Top FDK             | <b>1095mm</b><br>(43.11 in.)  | <b>230 mm</b><br>(9.06 in.)                | <b>220 mm</b><br>(8.66 in.)   |
|            | Card Reader                                           |                     | <b>917mm</b><br>(36.10in.)    | <b>145 mm</b><br>(5.71 in.)                | <b>135 mm</b><br>(5.31 in.)   |
|            | Receipt                                               |                     | <b>917mm</b><br>( 36.10in.)   | <b>145 mm</b><br>(5.71 in.)                | <b>135 mm</b><br>(5.31 in.)   |
|            | PIN Pad                                               | Number 5<br>key     | <b>866 mm</b><br>(34.09 in.)  | <b>106mm</b><br>(4.17 in.)                 | <b>96 mm</b><br>(3.78 in.)    |
|            | Contactless Card Reader<br>(under shelf)              |                     | <b>862 mm</b><br>(33.94 in.)  | <b>98 mm</b><br>(3.86 in.)                 | <b>88 mm</b><br>(3.46 in.)    |
|            | Private Audio                                         |                     | <b>834 mm</b><br>(32.84 in.)  | <b>39 mm</b><br>(1.54in.)                  | <b>29 mm</b><br>(1.14in.)     |
|            | Cash Exit/Entry                                       |                     | <b>749mm</b><br>(29.49 in.)   | <b>64 mm</b><br>(2.52 in.)                 | <b>54 mm</b><br>(2.13 in.)    |
|            | Barcode Reader                                        | Activation<br>point | <b>650 mm</b><br>(25.59 in.)  | <b>5 mm</b><br>(0.20 in.)                  | <b>0 mm</b><br>(0.00 in.)     |

ATM DIMENSIONS

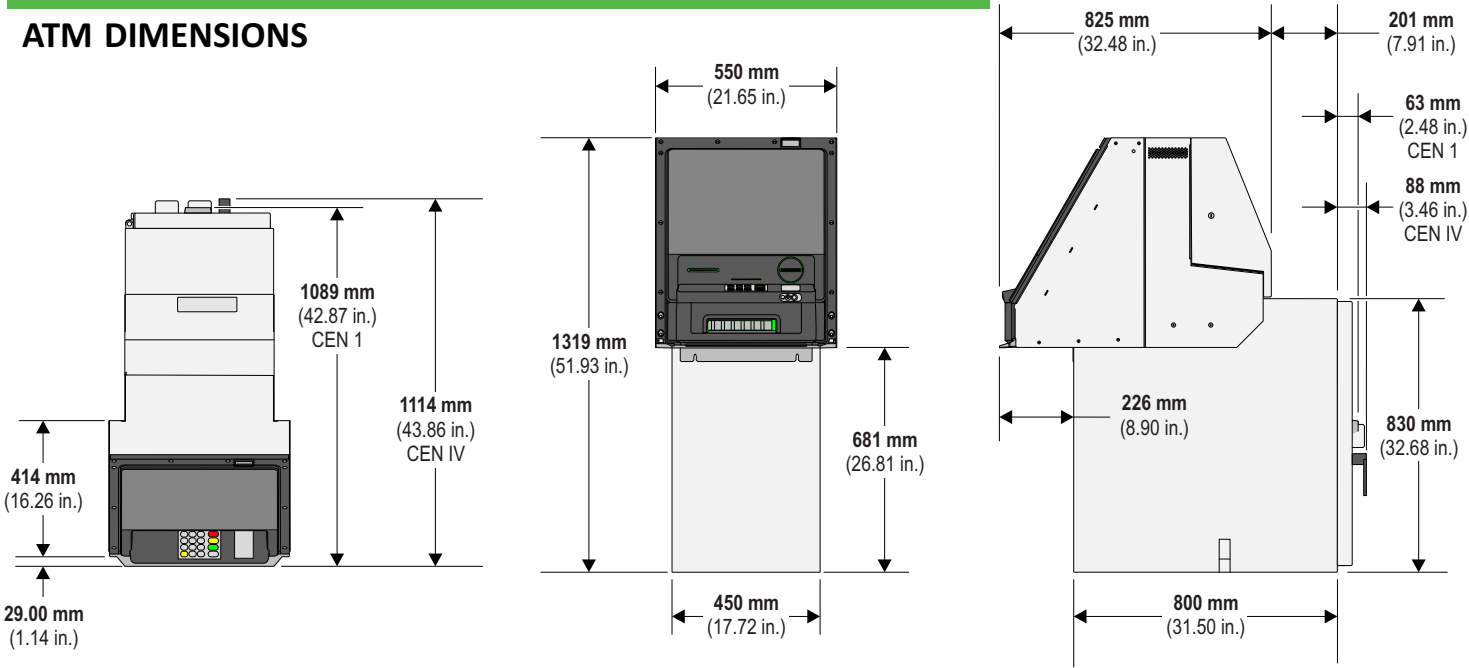

COLLAR DIMENSIONS

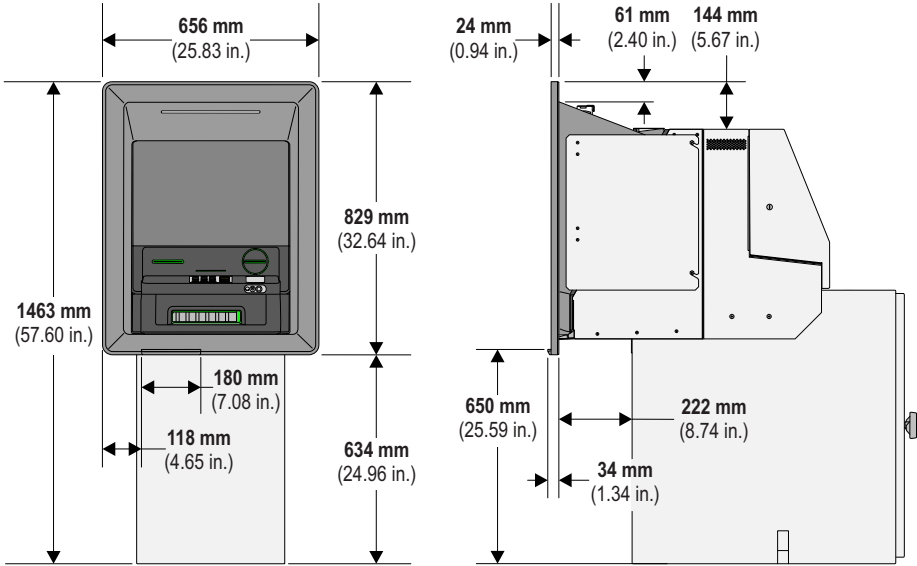

WEIGHT AND FLOOR LOADING


Standard Security Enclosures

|                | CEN Grade I                                           | CEN Grade IV                                          |
|----------------|-------------------------------------------------------|-------------------------------------------------------|
| Maximum weight | 498 kg<br>(1098 lb)                                   | 610 kg<br>(1345 lb)                                   |
| Floor loading  | 1383 kg/m <sup>2</sup><br>(283.3 lb/ft <sup>2</sup> ) | 1694 kg/m <sup>2</sup><br>(347.0 lb/ft <sup>2</sup> ) |


Solid and Gas Explosion Resistant (EX GAS) Security Enclosures

|                | CEN Grade III                                         |
|----------------|-------------------------------------------------------|
| Maximum weight | 560 kg<br>(1235 lb)                                   |
| Floor loading  | 1556 kg/m <sup>2</sup><br>(318.6 lb/ft <sup>2</sup> ) |


CABLE ENTRY

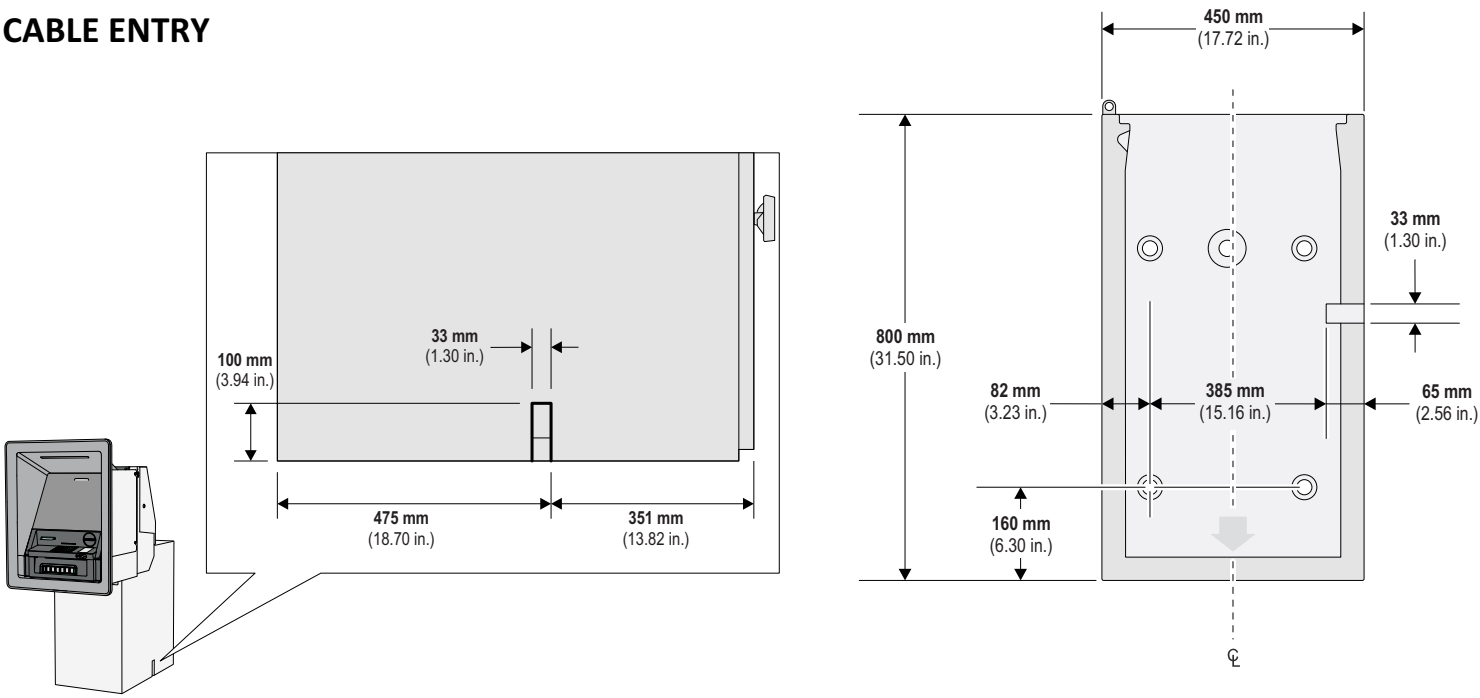

INSTALACIÓN A ALTURA ÓPTIMA

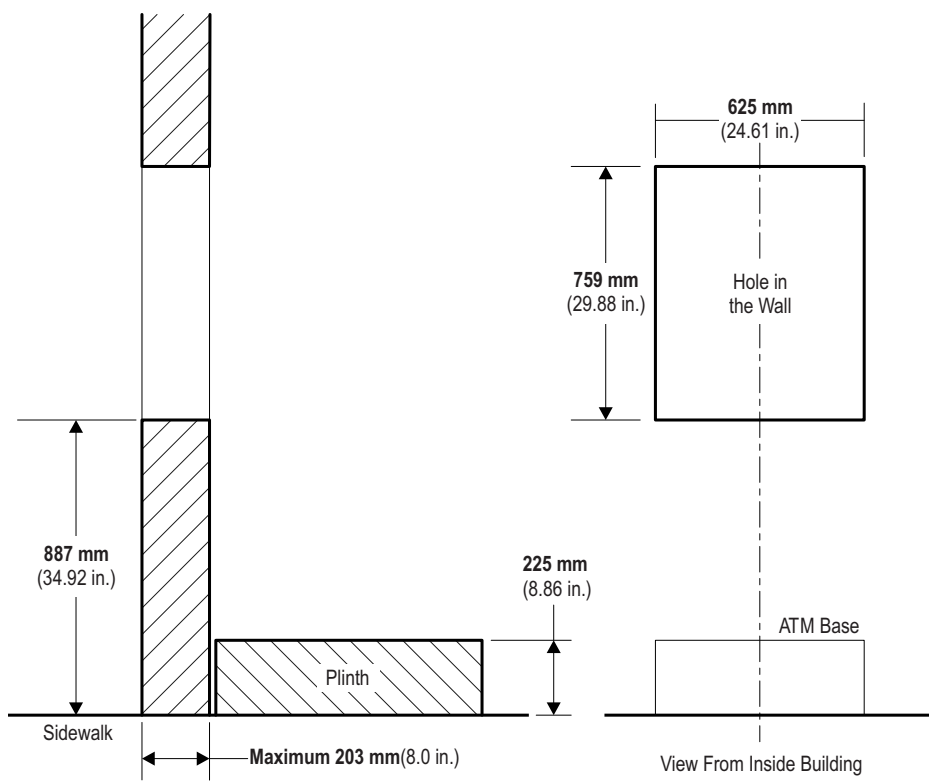


# AREAS DE SERVICIO OPTIMAS

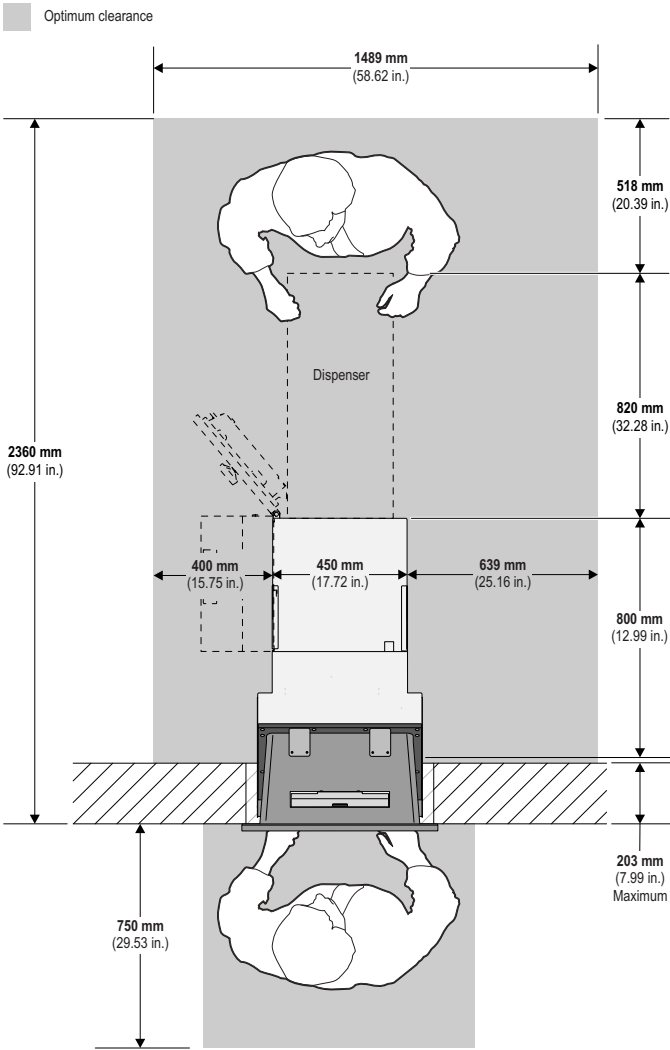


# AREAS DE SERVICIO MINIMAS


- Minimum clearance
- Additional clearance required for:
- 1 Variants with CEN III/IV Security Enclosure
  - 2 Variants with CEN III/IV GAS EX Security Enclosure

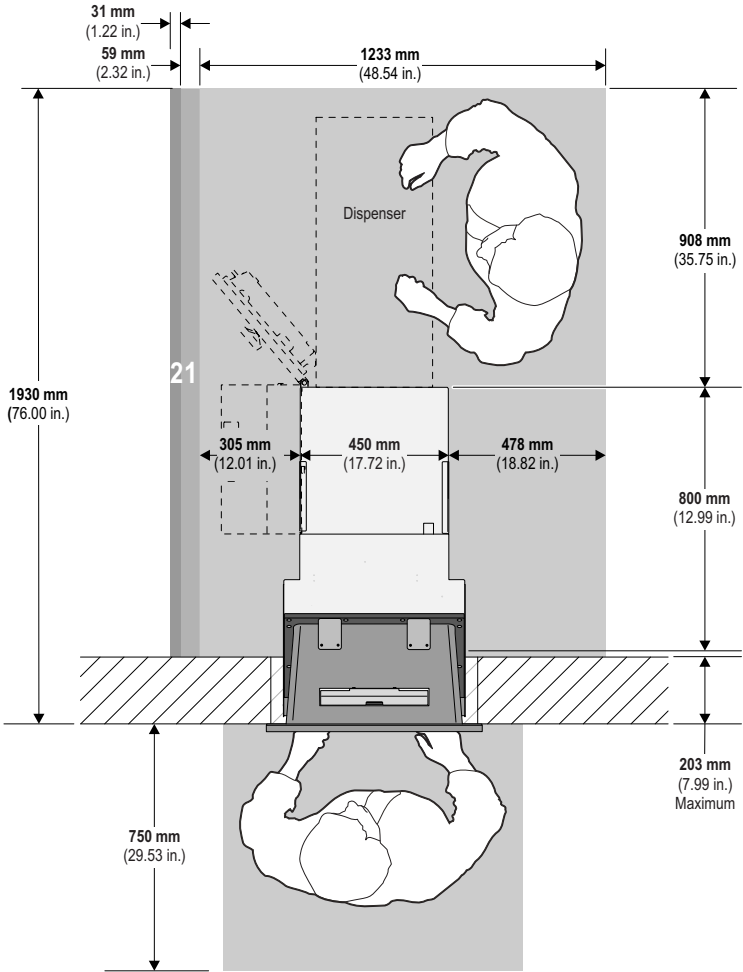

FACIA ITEMS

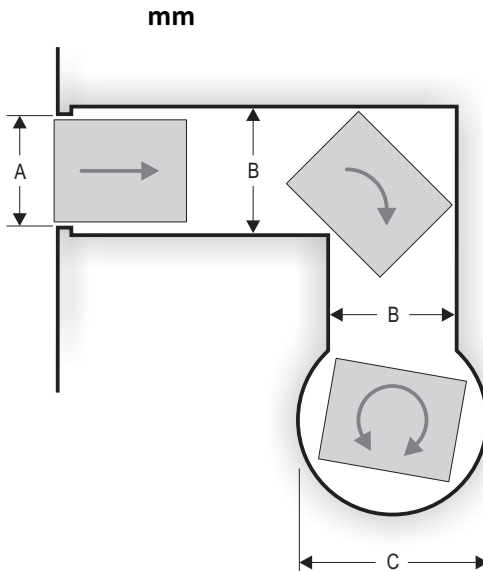


|   |                              | Packaged ATM<br>(pallet, carton<br>and lid) | Packaged ATM<br>(pallet and<br>carton) | Unpackaged ATM         |                        |
|---|------------------------------|---------------------------------------------|----------------------------------------|------------------------|------------------------|
|   |                              |                                             |                                        | CEN 1                  | CEN IV                 |
| A | Doorway or straight corridor | 818 mm<br>(32.20in.)                        | 813 mm<br>(32.01 in.)                  | 562 mm<br>(22.13 in.)  | 562 mm<br>(22.13 in.)  |
| B | Corridor with corner         | 1091 mm<br>(42.95 in.)                      | 1075 mm<br>(42.32in.)                  | 827 mm<br>(32.56 in.)  | 836 mm<br>(32.91 in.)  |
| C | Rotation about centre        | 1662 mm<br>(65.43 in.)                      | 1629 mm<br>(64.13in.)                  | 1334 mm<br>(52.52 in.) | 1357 mm<br>(53.43 in.) |

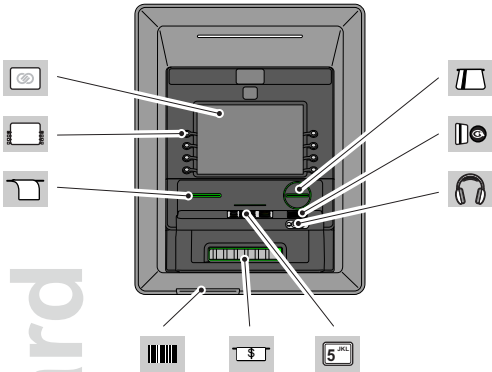


Heights and Depths

| Facia Item |                                                |                     | Height<br>from base<br>of ATM | Depth<br>from front<br>of barcode<br>shelf | Depth from<br>front of collar<br>shelf |
|------------|------------------------------------------------|---------------------|-------------------------------|--------------------------------------------|----------------------------------------|
|            | Touchscreen<br>381 mm (15.0 in.)               | Top                 | 1175 mm<br>(46.26 in.)        | 285 mm<br>(11.22 in.)                      | 275 mm<br>(10.83 in.)                  |
|            | Display with FDKs<br>381 mm (15.0 in.) Display | Top FDK             | 1095mm<br>(43.11 in.)         | 230 mm<br>(9.06 in.)                       | 220 mm<br>(8.66 in.)                   |
|            | Card Reader                                    |                     | 917mm<br>(36.10in.)           | 145 mm<br>(5.71 in.)                       | 135 mm<br>(5.31 in.)                   |
|            | Receipt                                        |                     | 917mm<br>( 36.10in.)          | 145 mm<br>(5.71 in.)                       | 135 mm<br>(5.31 in.)                   |
|            | PIN Pad                                        | Number 5<br>key     | 866 mm<br>(34.09 in.)         | 106mm<br>(4.17 in.)                        | 96 mm<br>(3.78 in.)                    |
|            | Contactless Card Reader<br>(under shelf)       |                     | 862 mm<br>(33.94 in.)         | 98 mm<br>(3.86 in.)                        | 88 mm<br>(3.46 in.)                    |
|            | Private Audio                                  |                     | 834 mm<br>(32.84 in.)         | 39 mm<br>(1.54in.)                         | 29 mm<br>(1.14in.)                     |
|            | Cash Exit/Entry                                |                     | 749mm<br>(29.49 in.)          | 64 mm<br>(2.52 in.)                        | 54 mm<br>(2.13 in.)                    |
|            | Barcode Reader                                 | Activation<br>point | 650 mm<br>(25.59 in.)         | 5 mm<br>(0.20 in.)                         | 0 mm<br>(0.00 in.)                     |

ATM DIMENSIONS

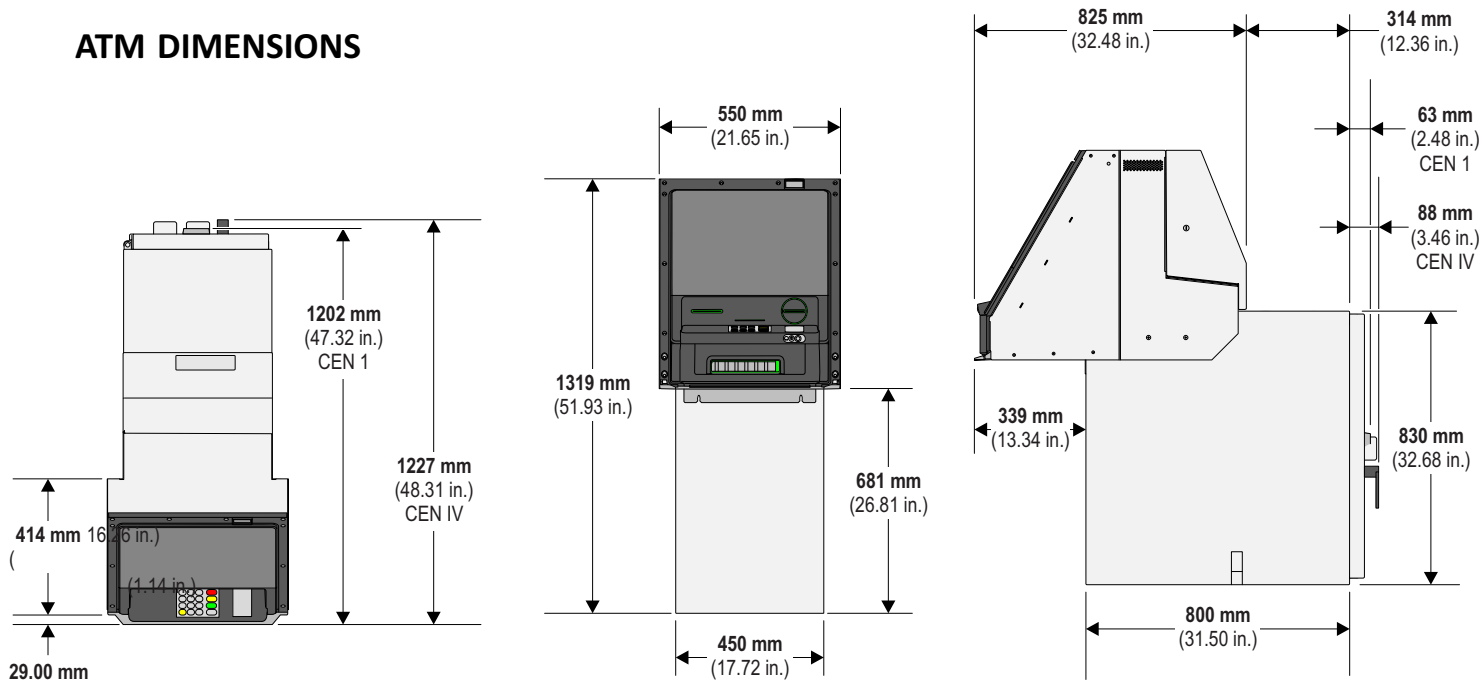

COLLAR DIMENSIONS

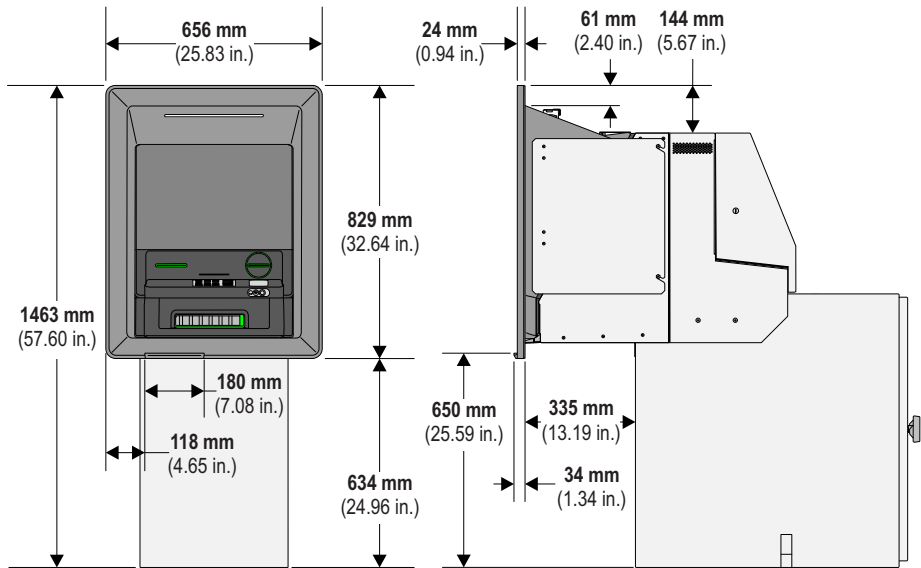


WEIGHT AND FLOOR LOADING

Standard Security Enclosures

|                | CEN Grade I                                           | CEN Grade IV                                          |
|----------------|-------------------------------------------------------|-------------------------------------------------------|
| Maximum weight | 498 kg<br>(1098 lb)                                   | 610 kg<br>(1345 lb)                                   |
| Floor loading  | 1383 kg/m <sup>2</sup><br>(283.3 lb/ft <sup>2</sup> ) | 1694 kg/m <sup>2</sup><br>(347.0 lb/ft <sup>2</sup> ) |


Solid and Gas Explosion Resistant (EX GAS) Security Enclosures

|                | CEN Grade III                                         |
|----------------|-------------------------------------------------------|
| Maximum weight | 560 kg<br>(1235 lb)                                   |
| Floor loading  | 1556 kg/m <sup>2</sup><br>(318.6 lb/ft <sup>2</sup> ) |

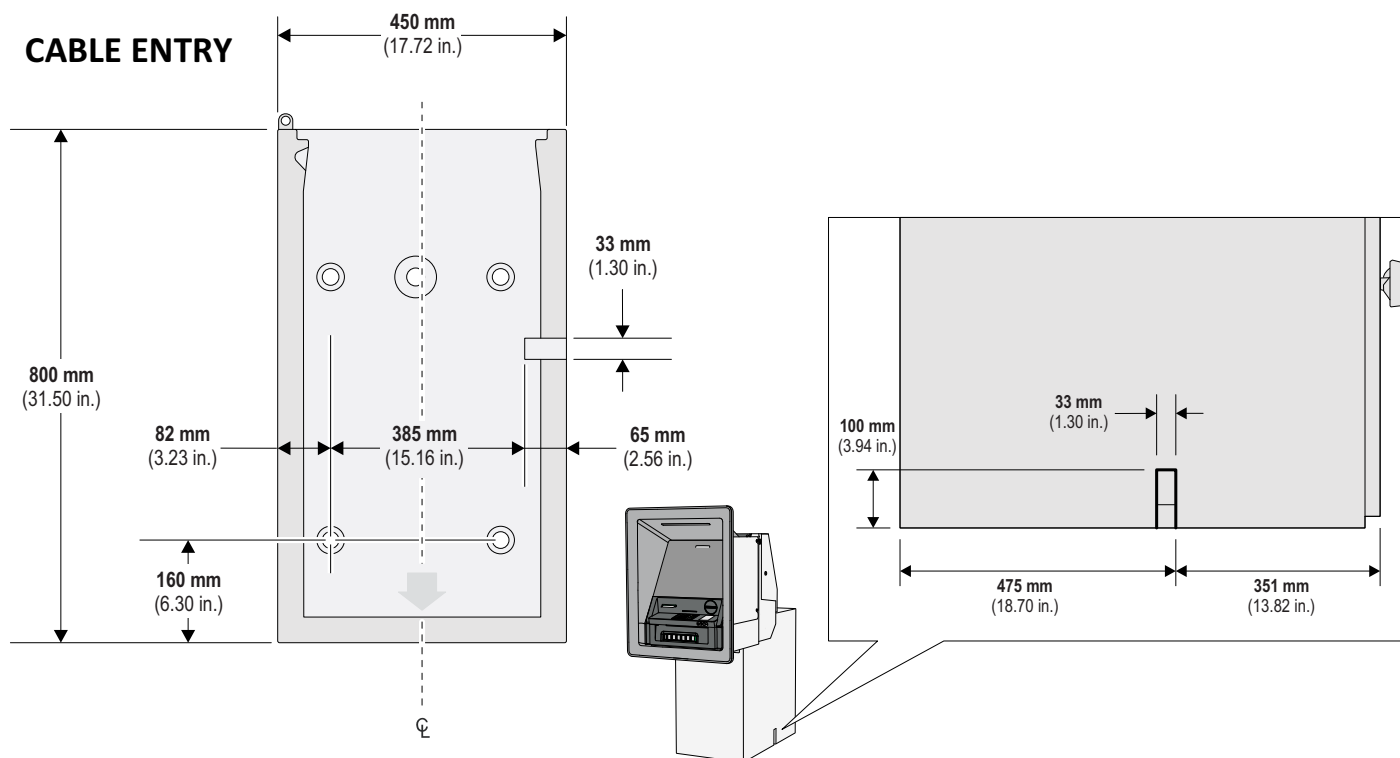


### Hole at Optimum Height

This height assures the best display viewability for able-bodied people. It does NOT comply with the lowered height regulations listed in the previous section.

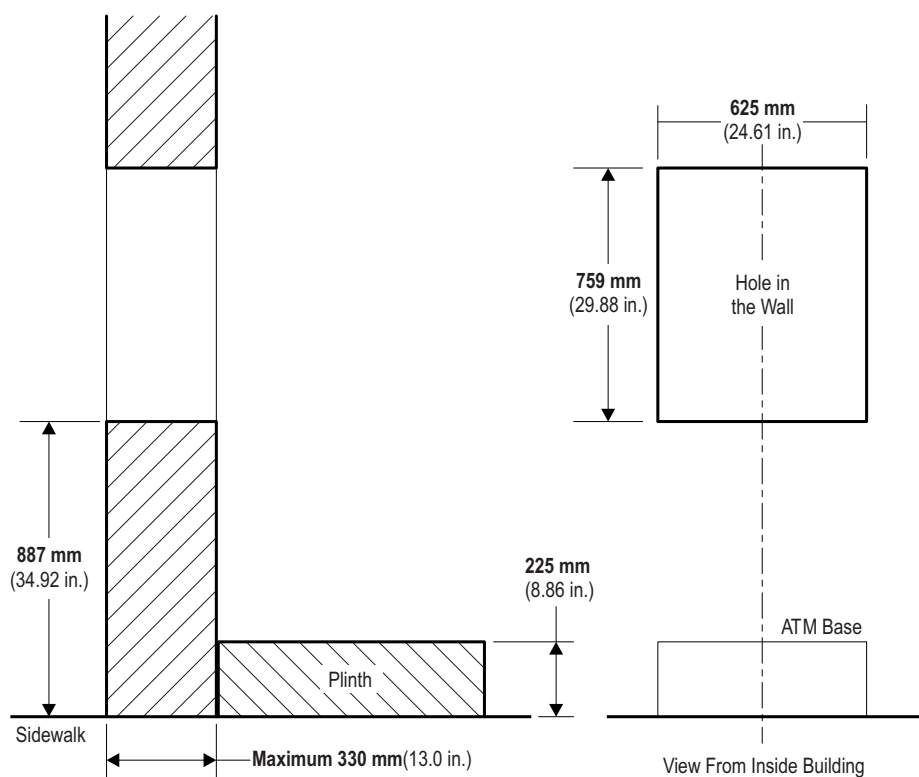

# AREAS DE SERVICIO OPTIMAS

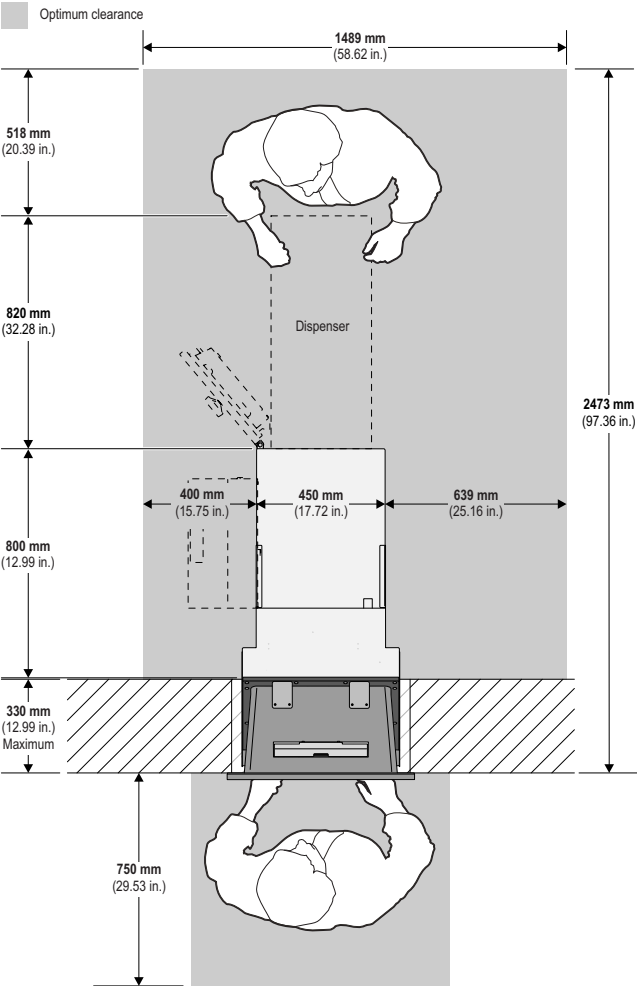

# AREAS DE SERVICIO MINIMAS

- Minimum clearance
- Additional clearance required for:
- 1 Variants with CEN III/IV Security Enclosure
  - 2 Variants with CEN III/IV GAS EX Security Enclosure

